



**Eur päisches
Patentamt**

**Eur pean
Patent Office**

**Office européen
des brevets**

Q7641/
101

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02360245.1

Der Präsident des Europäischen Patentamts;
im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Eur pälsch e
Patentamt

Eur pean
Pat nt Offic

Offic uropé n
des br vêts

Anmeldung Nr:
Application no.: 02360245.1
Demande no:

Anmeldetag:
Date of filing: 26.08.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

ALCATEL
54, rue la Boétie
75008 Paris
FRANCE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

Raman-active optical fiber

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G02B6/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignés lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

5

10

Raman-Active Optical Fiber

Field of the Invention

15 The present invention relates to the field of optical fibers and more particularly to a device comprising a Raman-active optical fiber for amplifying optical signals by stimulated Raman scattering.

Background of the Invention

20

It has been known for some time that optical fibers can be advantageously used to amplify, by means of stimulated Raman scattering, radiation guided through the fiber. Raman amplifiers and lasers appear to be excellent components for the use in transmission systems and especially in high-

25 capacity photonic networks designed to provide various data-based broadband services.

Today's Raman amplifiers and lasers typically use silica, germano-silicate, or phospho-silicate based fibers. The Raman spectra of silica and germano-silica

30 based fibers exhibit a single peak and the full bandwidth of Raman Stokes shift does not exceed 100 nm when pumped at 1,5 μm . Phospho-silicate fibers have a twin-peaked spectrum that shows one complementary localized shift at 300 nm when pumped at 1,5 μm .

Some proposals have been made so far for non high silica content based glass systems. EP 248 517 B1 discloses glass compositions for use in a Raman amplifier which contain GeO_2 or SiO_2 as glass-forming first component and a heavy metal oxide second component such as PbO , $\text{BiO}_{1.5}$, $\text{SbO}_{1.5}$, $\text{TlO}_{0.5}$.

- 5 These fibers have a silica-like bandwidth of Raman shift but are more efficient in terms of Raman gain coefficient.

- 10 The conference article "Ultra-wideband hybrid tellurite/silica fiber Raman amplifier" by H. Masuda, OFC 2002, ThB6, discloses tellurite-based glasses with a twin-peaked spectrum, which exhibit a large gain coefficient and bandwidth up to 170 nm when pumped at 1,5 μm .

- 15 It is an object of the present to provide a Raman-active glass composition for use in Raman amplifiers or lasers with improved flatness and bandwidth of Raman gain.

Summary of the Invention

- 20 The object is achieved by a multi-component oxide glass composition with a first major component as glass-former of SiO_2 between 30 and 90 mol%, a Raman-active component system of Li_2O and Nb_2O_5 in a concentration of up to 50 mol% in total. Preferably, the composition further includes a glass modifier component of alkaline (Li_2O , Na_2O , K_2O) and/or earth-alkaline (MgO , CaO , BaO etc.) in a concentration of up to 40 mol%.

- 25 The most significant advantages of the present invention as compared with previously proposed compositions are the flatness and seamless Raman gain. We obtained a Stokes shift of up to 200 nm when pumped at 1,4 μm . This is two times larger than with known silica based fibers and 14 % larger than with
30 tellurite based fibers. Moreover, the Raman gain is two times flatter than in tellurite-based fiber. Additionally, a silicate based fiber according to the invention would be more compatible with standard silica transmission fibers than a tellurite based fiber.

The term "gain flatness" refers to the change in the shape of the gain spectrum over a particular wavelength range. A flat gain means a substantially equal gain for all wavelengths over the wavelength range.

5 **Brief Description of the Drawings**

A preferred embodiment of the present invention will now be described with reference to the accompanying drawings in which

- 10 figure 1 shows a comparison of Raman gain spectra between the proposed glass composition and known glasses and
figure 2 shows a block diagram of a Raman amplifier having an optical fiber made of the new glass composition.

15 **Detailed Description of the Invention**

- In a preferred embodiment, an optical fiber has a fiber core with a higher refractive index and a cladding surrounding the core with a lower refractive index. According to the invention the fiber core is made of a multi-component
20 oxide glass composition of a glass-forming component and a Raman-active component. The glass former is SiO_2 and the Raman active component is a system of Li_2O and Nb_2O_5 . The concentration of the glass former may be selected in the range between 30 and 90 mol% and the Raman active component may have a concentration of up to 50 mol%. The cladding may be
25 of a silicate-based glass.

The invention is based on the discovery that the joint positive influence of Nb_2O_5 and Li_2O associated in the silica glass network increases Raman gain flatness and improves Raman gain bandwidth.

30

The Raman characteristics of the composition strongly depend on the ration between the two Raman active components Li_2O and Nb_2O_5 and the ration can therefore be chosen according to the intended application. For example, for an application in lumped Raman amplifiers, the ration between Li_2O and

Nb₂O₅ can be adjusted for maximum Raman gain flatness. Conversely, for an application in a Raman laser, the ratio can be chosen for maximum Raman shift and gain intensity at this shift. It is to be noted that best ratio between the two Raman active components in the ranges defined above for a particular intended use will present no problem to those skilled in the art and can be found out without undue experimentation.

The multi-component glass composition may further include one or more glass modifier components of alkaline such as Li₂O, Na₂O, K₂O, Rb₂O, Cs₂O and/or earth-alkaline such as BeO, MgO, CaO, SrO, BaO in a concentration of up to 40 mol%. The modifier component could be Raman active components as well but their principal role is to modify the glass structure and mechanical or other properties. The Li₂O can play a double role as Raman active components and as glass modifier. This means that an additional glass modifier is not mandatory to the invention.

In the preferred embodiment, the fiber core has a glass composition of 60% SiO₂, 10% Li₂O, 10% Nb₂O₅ and additional 20% of Na₂O, which may also be replaced by further 20% Li₂O.

The fiber can be manufactured according to any known technique such as the double crucible method, the rod in tube method or the soft core method. The pre-forms of the fiber core for the latter two techniques can be produced according to the classical rotational method or MCVD technique.

Fig.1 compares the normalized material Raman coefficient for silica, phosphosilicate and tellurite based glasses with the proposed composition. The material Raman coefficients are normalized to the intensity of the silica peak at 440 cm⁻¹. The proposed compositions have been produced by classical melting technique and Raman gain coefficient has been measured on the bulk sample.

The material Raman gain coefficient measured here presents the room temperature cross section of the material $\sigma_{300}(\Delta\nu)$, which reduced to zero

Kelvin $\sigma_R(\Delta\nu)$ gives the effective frequency shift dependent stimulated Raman scattering coefficient $g_{eff}(\Delta\nu)$:

$$g_{eff}(\Delta\nu) = \sigma_R(\Delta\nu) \lambda^3 / c^2 h n(\nu)^2,$$

where $n(\nu)$ is the refractive index and l , c , h have their usual meaning.

5

Therefore, the net Raman gain of an optical fiber is given by:

$$G = 4.34 [(P_p / A_{eff}) L_{eff} g_{eff} - (\alpha' L)],$$

Where

- P_p is the pump power;
- 10 A_{eff} is the effective area for Raman gain;
- L_{eff} is the effective fiber length;
- $G_{eff}(\Delta\nu)$ is the effective frequency shift dependent stimulated Raman scattering coefficient;
- α' is the loss coefficient; and
- 15 L is the fiber length.

The glass composition can further be improved, either from the point of view of glass stability and characteristic parameters or even for Raman properties, using others oxide components such as: P_2O_5 , B_2O_3 , Al_2O_3 , Ta_2O_5 , V_2O_5 ,
 20 As_2O_3 , GeO_2 , TiO_2 , ZrO_2 , PbO , Bi_2O_3 , Mo_2O_3 , WO_3 , SnO_2 , Sb_2O_3 , Ga_2O_3 , In_2O_3 , TeO_2 , or sulfide components.

The use of this fiber in optical devices opens large possibilities for multi-band amplifiers and for Raman tunable lasers. The proposed compositions are also
 25 promising for non-linear optical applications. It has been shown that heat treatment induces the crystallization of small $LiNbO_3$ particles, which non linear optical susceptibilities are at least one order of magnitude greater than in undoped silica. Such compositions thus appear suitable for the design of active components, like tunable fiber Bragg grating.

30

The Raman-active fiber according to the present invention may be used whenever efficient Raman amplification of fiber-guided optical signals is

required (typically in the range 0.5 μm to 4.0 μm and in particular in the so-called C and L bands having a wavelength range between 1535 nm to 1565 nm and 1565 nm to 1615 nm, respectively).

- 5 Figure 2 shows schematically an optical fiber communications system which uses Raman amplification to compensate for the signal attenuation in the transmission path. A signal source SOURCE (e.g., a modulated semiconductor laser) is connected to a signal sink SINK via an optical fiber link (e.g., conventional SiO_2 -based low loss single mode fiber). The fiber link comprises
- 10 a Raman amplifier AMP to compensate for signal attenuation. The amplifier is basically consists of a Raman-active multi-component oxide glass fiber MOGF of the type described above, which may be wound up in the amplifier housing, and a pump source PUMP coupled to the Raman-active fiber.
- 15 The pump source PUMP can be a single source or it can comprise a battery of sources, e.g., light emitting diodes. The pump radiation can be cw or pulsed, is of shorter wavelength than the signal radiation by an amount that typically corresponds substantially to the Stokes shift that results in maximum Raman scattering, and can be coupled into the Raman-active fiber so as to be co-
- 20 and/or counter-propagating with the signal radiation. Furthermore, at least in some cases it may be advantageous to provide filter means (A, B) for selectively removing pump radiation from the transmission path, to prevent accumulation of pump frequency background radiation.

25

5

10

What is claimed is

1. Multi-component oxide glass composition for use as core of an optical waveguide, said composition comprising
 - 15 - a glass former component made of SiO_2 having a concentration of between 30 and 90 mol% and
 - two Raman-active components of Li_2O and Nb_2O_5 in a concentration of up to 50 mol% in total.
- 20 2. A composition according to claim 1, further comprising at least one glass modifier component of alkaline or earth-alkaline in a concentration of up to 40 mol%.
- 25 3. A composition according to claim 2, wherein said glass modifier component is any of the list Li_2O , Na_2O , K_2O , Rb_2O , Cs_2O , BeO , MgO , CaO , SrO , BaO .
- 30 4. A composition according to claim 1, further comprising at least one other oxide component from the list P_2O_5 , B_2O_3 , Al_2O_3 , Ta_2O_5 , V_2O_5 , As_2O_3 , GeO_2 , TiO_2 , ZrO_2 , PbO , Bi_2O_3 , Mo_2O_3 , WO_3 , SnO_2 , Sb_2O_3 , Ga_2O_3 , In_2O_3 , TeO_2 in a concentration of up to 40%.
5. A composition according to claim 1, further comprising at least one sulfide component in minor concentration.

6. An Raman-active optical fiber having a core with an higher refractive index and a cladding with a lower refractive index, said core comprising a multi-component oxide glass composition comprising
- 5 - a glass former component made of SiO_2 having a concentration of between 30 and 90 mol% and
- two Raman-active components of Li_2O and Nb_2O_5 in a concentration of up to 50 mol% in total.
- 10 7. A fiber according to claim 6, wherein said inner cladding is made of silicate glass.
8. A fiber according to claim 6, having areas comprising small LiNbO_3 crystallization particles induced by heat treatment of the fiber.
- 15 9. An optical device comprising a Raman-active optical fiber, said fiber having a core with an higher refractive index and an cladding with a lower refractive index, said core comprising a multi-component oxide glass composition comprising
- 20 - a glass former component made of SiO_2 having a concentration of between 30 and 90 mol% and
- two Raman-active components of Li_2O and Nb_2O_5 in a concentration of up to 50 mol% in total.
- 25 10. An optical device according to claim 9 being a Raman amplifier or laser comprising a pump source coupled to said Raman-active fiber.

5

10

Abstract

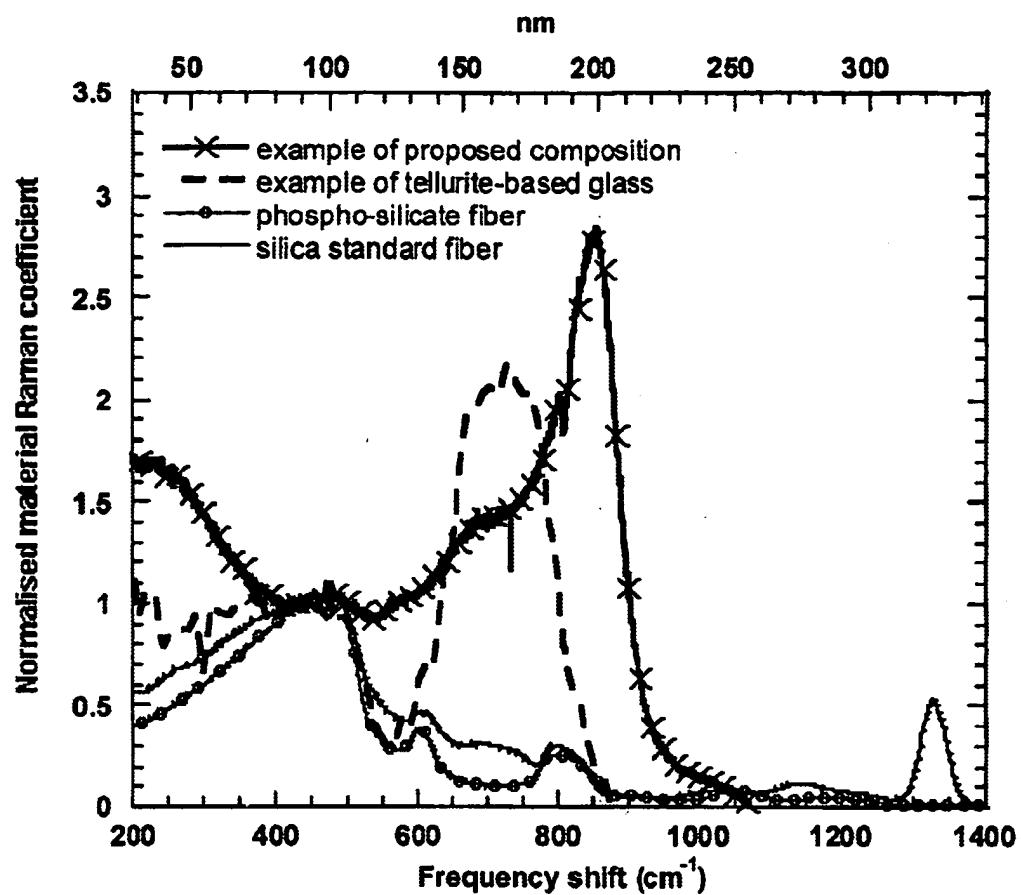
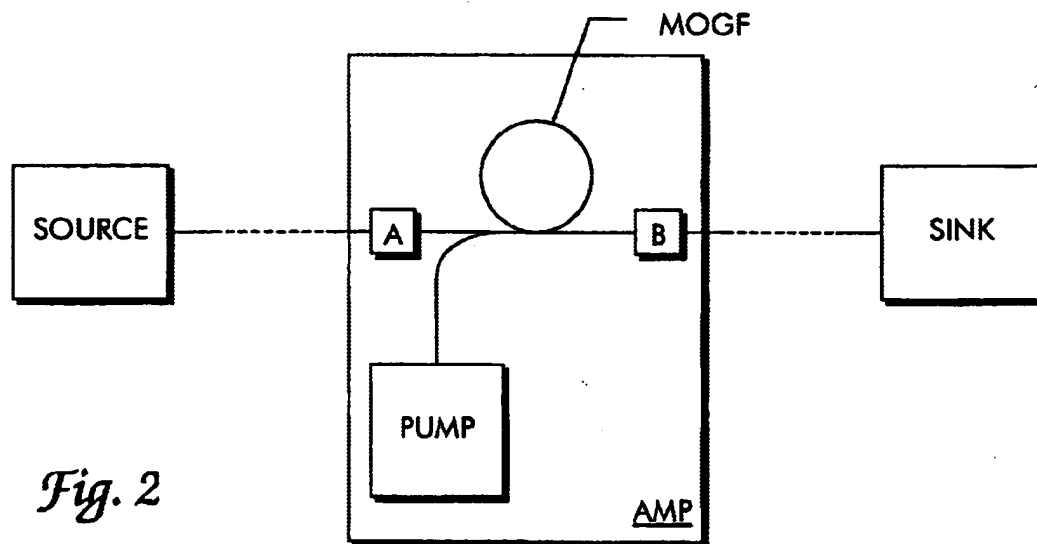
Raman-Active Optical Fiber

15

20 An optical fiber has a fiber core with a higher refractive index and a cladding surrounding the core with a lower refractive index. The fiber core is made of a multi-component oxide glass composition which consists of a glass-forming component and two Raman-active components. The glass former is SiO_2 and the Raman active components are of Li_2O and Nb_2O_5 . The concentration of the glass former is between 30 and 90 mol% and of the Raman active components is up to 50 mol% in total. The composition may further include a glass-modifying component of alkaline such as Li_2O , Na_2O , K_2O , Rb_2O , Cs_2O or earth-alkaline such as BeO , MgO , CaO , SrO , BaO in a concentration of up to 40 mol%.

25

(Figure 1)

*Fig. 1**Fig. 2*